


TUNG-SOL

DOUBLE-DIODE TRIODE

MINIATURE TYPE



GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

6.3±10 VOLTS 0.3 AMP.

AC OR DC

ANY MOUNTING POSITION


BOTTOM VIEW
 MINIATURE BUTTON
 7 PIN BASE

78T

THE 6AV6 COMBINES A HIGH- μ TRIODE AND TWO INDEPENDENT DIODE UNITS IN THE 7 PIN MINIATURE CONSTRUCTION. IT PERMITS A SINGLE TUBE TO FUNCTION AS DETECTOR, AVC RECTIFIER, AND AUDIO AMPLIFIER. COUPLING BETWEEN THE DIODE AND TRIODE SECTIONS IS MINIMIZED BY THE USE OF INTERNAL SHIELDING.

DIRECT INTERELECTRODE CAPACITANCES

	WITH SHIELD ^A	WITHOUT SHIELD	
GRID TO PLATE: (G TO P)	2	2	μ f
INPUT: G TO (H+K)	2.2	2.2	μ f
OUTPUT: P TO (H+K)	1.2	0.8	μ f
COUPLING: #2 DIODE PLATE TO GRID (MAX.)	0.04	0.04	μ f

^AEXTERNAL SHIELD #316 CONNECTED TO PIN #2.

RATINGS ←

INTERPRETED ACCORDING TO DESIGN MAXIMUM SYSTEM

HEATER VOLTAGE	6.3±10%	VOLTS
MAXIMUM PLATE VOLTAGE	330	VOLTS
MAXIMUM PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	200	VOLTS
DC COMPONENT	100	VOLTS
MAXIMUM PLATE DISSIPATION	0.55	WATT
MAXIMUM POSITIVE DC GRID #1 VOLTAGE	0	VOLTS
MAXIMUM DIODE CURRENT EACH UNIT FOR CONTINUOUS OPERATION	1	MA.

→ INDICATES A CHANGE.

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER


PLATE VOLTAGE	100	250	VOLTS
GRID #1 VOLTAGE	-1	-2	VOLTS
PLATE RESISTANCE	80 000	62 500	OHMS
AMPLIFICATION FACTOR	100	100	
TRANSCONDUCTANCE	1 250	1 600	μMHOS
PLATE CURRENT	0.5	1.2	MA.
AVERAGE DIODE CURRENT AT 10 VOLTS DC (EACH UNIT)	2.0	2.0	MA.

RESISTANCE COUPLED AMPLIFIER

TRIODE UNIT

PLATE SUPPLY VOLTAGE	90	250	VOLTS
CONTROL GRID VOLTAGE	0	0	VOLTS
PLATE LOAD RESISTOR	220 000	470 000	OHMS
CONTROL GRID RESISTOR	10.0	10.0	MEG OHMS
INPUT CONDENSER	0.01	0.01	μf
OUTPUT CONDENSER	0.01	0.01	μf
GRID RESISTOR OF FOLLOWING STAGE	470 000	470 000	OHMS
SIGNAL SOURCE IMPEDANCE (MAX.)	1 000	1 000	OHMS
DISTORTION	5	5	PERCENT
OUTPUT VOLTAGE	5.5	30	VOLTS
VOLTAGE GAIN AT 400 CPS	42	63	

→ INDICATES A CHANGE OR ADDITION.

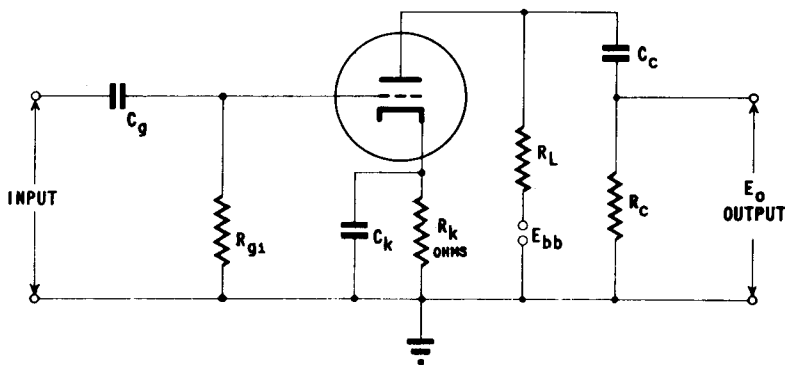

NOTE: COUPLING CAPACITORS C_g AND C_c SHOULD BE SELECTED TO GIVE DESIRED FREQUENCY RESPONSE. R_k SHOULD BE ADEQUATELY BY-PASSED BY CAPACITOR C_k .