



10FP4-A

10FP4-A
ET-T1143
Page 1
10-54

CATHODE-RAY TUBE

10-INCH ROUND, GLASS
FOCUS—MAGNETIC
DEFLECTION—MAGNETIC
50-DEGREE DEFLECTION ANGLE

9 1/8- BY 6 3/4-INCH PICTURE SIZE
FACEPLATE—SPHERICAL, GRAY
EXTERNAL CONDUCTIVE COATING
ALUMINIZED SCREEN

DESCRIPTION AND RATING

The 10FP4-A is a magnetic-focus and deflection, direct-view all-glass picture tube which provides a 9 1/8- by 6 3/4-inch picture for television applications. The electron gun does not require an external ion trap magnet. Other features of this tube include a high-quality gray faceplate which increases picture contrast and detail under high ambient light conditions, and a reflective aluminized screen to increase light output and prevent ion-spot blemish. An external conductive coating serves as a filter capacitor when grounded.

GENERAL

ELECTRICAL

Heater Voltage	6.3	Volts
Heater Current	0.6 ± 10%	Amperes
Focusing Method—Magnetic		
Deflecting Method—Magnetic		
Deflection Angle, approximate	50	Degrees
Direct Interelectrode Capacitances, approximate		
Cathode to All Other Electrodes	5	μf
Grid-No. 1 to All Other Electrodes	6	μf
External Conductive Coating to Anode		
Maximum	2500	μf
Minimum	500	μf

OPTICAL

Phosphor Number—P4, Sulfide Type		
Fluorescent Color—White		
Phosphorescent Color—White		
Persistence—Short		
Faceplate—Gray		
Light Transmission at Center, approximate	74	Percent



MECHANICAL

Over-all Length	17 ⁵ / ₈ ± ³ / ₈	Inches
Greatest Bulb Diameter	10 ¹ / ₂ ± ¹ / ₈	Inches
Minimum Useful Screen Diameter	9 ¹ / ₈	Inches
Neck Length	8 ³ / ₁₆	Inches

Bulb Number, ASA Designation—J84C

Bulb Contact—Recessed Small-cavity Cap, JETEC No. J1-21

Base—Small-shell Duodecal 5-Pin, JETEC No. B5-57

Basing, JETEC Designation—12N

Bulb Contact Alignment

Anode Contact Aligns with Pin No. 3 Position ±30 Degrees

Mounting Position—Any

Net Weight, approximate 10 ¹/₂ Pounds**MAXIMUM RATINGS****DESIGN-CENTER VALUES***

Anode Voltage †	12,000 Max	Volts DC
Grid-No. 2 Voltage	410 Max	Volts DC
Grid-No. 1 Voltage		
Negative-Bias Value	125 Max	Volts DC
Positive-Bias Value	0 Max	Volts DC
Positive-Peak Value	2 Max	Volts

Peak Heater-Cathode Voltage ‡

Heater Negative with Respect to Cathode

During Warm-up Period not to Exceed 15 Seconds 410 Max Volts

After Equipment Warm-up Period 140 Max Volts

Heater Positive with Respect to Cathode 140 Max Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage §	11,000	Volts DC
Grid-No. 2 Voltage	300	Volts DC
Grid-No. 1 Voltage π	−28 to −72	Volts DC
Focusing-Coil Current ▲, approximate	100	Milliamperes DC

MAXIMUM CIRCUIT VALUES

Grid-No. 1 Circuit Resistance 1.5 Max Megohms

* The maximum ratings provide a ten-percent safety factor in accordance with the standard design-center system of rating cathode-ray tubes. The tube will withstand the combined effects of variations in line voltage and components provided the maximum design-center values are not exceeded by more than ten percent.


† Anode and grid-No. 3 which are connected together within the tube are referred to herein as anode.

‡ Cathode should be returned to one side or to the midtap of the heater transformer winding.

§ Brightness and focus quality decrease with decreasing anode voltage. In general, the anode voltage should not be less than 8,000 volts.

π For visual extinction of focused raster.

▲ For RETMA focusing coil No. 109 with distance from the yoke-reference-line to center-of-air-gap equal to 4½-inches.

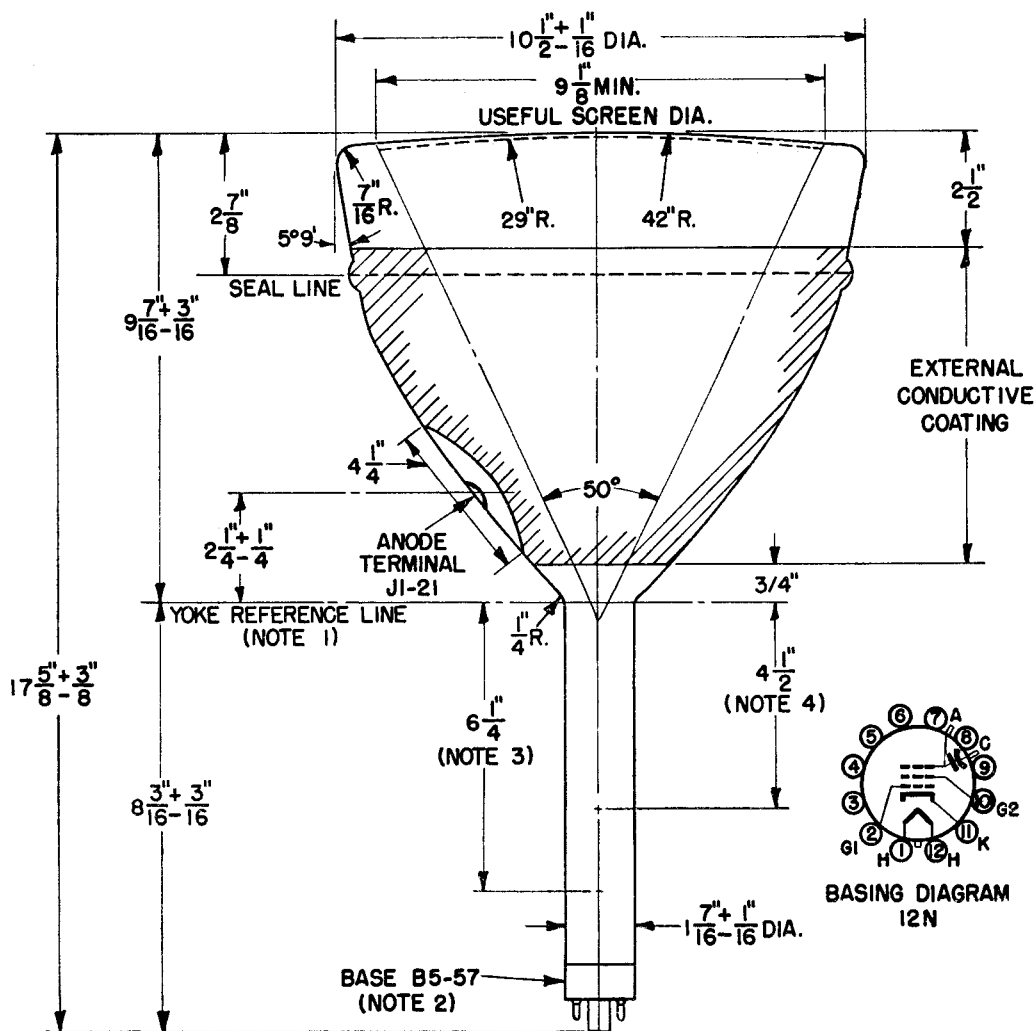

NOTES:

1. REFERENCE LINE IS DETERMINED BY THE PLANE OF THE UPPER EDGE OF THE REFERENCE-LINE GAGE (RETMA NO. 112) WHEN THE GAGE IS RESTING ON THE CONE.
2. ANODE TERMINAL ALIGNS WITH PIN-NO. 3 POSITION ± 30 DEGREES.
3. APPROXIMATE POSITION OF ION-TRAP MAGNET, APPLIES ONLY TO IOBP4 AND IOBP4-A.
4. RECOMMENDED POSITION FOR CENTER OF FOCUSING FIELD.