

## TUNG-SOL

## HIGH VACUUM CATHODE-RAY TUBE

## ELECTROSTATIC DEFLECTION AND FOCUSING

5CP1  
NO. 1 PHOSPHOR  
GREEN FLUORESCENT SCREEN  
MEDIUM PERSISTENCE

5CP4  
NO. 4 PHOSPHOR  
WHITE FLUORESCENT SCREEN  
MEDIUM PERSISTENCE

COATED UNIPOTENTIAL CATHODE

HEATER  
6.3 VOLTS 0.6 AMPERE  
AC OR DC

GLASS BULB

MEDIUM SHELL DIHEPTAL 12 PIN BASE

## RATINGS\*

MAXIMUM ANODE NO. 3 VOLTAGE (SUPPLEMENTARY HIGH VOLTAGE ELECTRODE)	4400	VOLTS
MAXIMUM ANODE NO. 2 VOLTAGE (HIGH VOLTAGE ELECTRODE)	2200	VOLTS
MAXIMUM ANODE NO. 1 VOLTAGE (FOCUSING ELECTRODE)	1100	VOLTS
GRID VOLTAGE (CONTROL ELECTRODE)	NEVER POSITIVE	
MAXIMUM PEAK VOLTAGE BETWEEN ANODE NO. 2 AND ANY DEFLECTOR	550	VOLTS
MAXIMUM DC HEATER CATHODE POTENTIAL <sup>A</sup>	125	VOLTS
MAXIMUM GRID CIRCUIT RESISTANCE	1.5	MEGOHMS
MAXIMUM IMPEDANCE OF ANY DEFLECTOR CIRCUIT AT HEATER SUPPLY FREQUENCY	1.0	MEGOHM

\* MAXIMUM RATINGS ARE ABSOLUTE VALUES

## DIRECT INTERELECTRODE CAPACITANCES (APPROX.)

GRID TO ALL OTHER ELECTRODES	8.0	$\mu\mu f$
CATHODE TO ALL OTHER ELECTRODES	8.0	$\mu\mu f$
D1 TO D2	2.0	$\mu\mu f$
D3 TO D4	2.0	$\mu\mu f$
D1 TO ALL OTHER ELECTRODES	9.0	$\mu\mu f$
D3 TO ALL OTHER ELECTRODES	7.0	$\mu\mu f$
D1 TO ALL OTHER ELECTRODES EXCEPT D2	7.0	$\mu\mu f$
D2 TO ALL OTHER ELECTRODES EXCEPT D1	7.0	$\mu\mu f$
D3 TO ALL OTHER ELECTRODES EXCEPT D4	5.0	$\mu\mu f$
D4 TO ALL OTHER ELECTRODES EXCEPT D3	6.0	$\mu\mu f$

CONTINUED NEXT PAGE

## TUNG-SOL

CONTINUED FROM PRECEDING PAGE

## TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

ANODE NO. 3 VOLTAGE	2000	3000	4000	VOLTS
ANODE NO. 2 VOLTAGE <sup>B</sup>	2000	1500	2000	VOLTS
ANODE NO. 1 VOLTAGE FOR FOCUS AT 75% OF GRID VOLTAGE CUT-OFF <sup>C</sup>	575	430	575	VOLTS
GRID VOLTAGE FOR CUT-OFF <sup>D</sup>	-60 <sup>E</sup>	-45 <sup>E</sup>	-60 <sup>E</sup>	VOLTS
DEFLECTION SENSITIVITY: <sup>F</sup>				
D1 AND D2	0.350	0.370	0.280	MM/VOLT DC
D3 AND D4	0.390	0.490	0.340	MM/VOLT DC
DEFLECTION FACTOR <sup>F</sup>				
D1 AND D2	73	69	92	VOLTS DC/IN
D3 AND D4	64	56	74	VOLTS DC/IN

## SPOT POSITION AND TEST CONDITIONS

THE UNDEFLECTED FOCUSED SPOT FALLS WITHIN A 25 MM. SQUARE CENTERED ON THE TUBE FACE.

## TEST CONDITIONS ARE:

ANODE NO. 3 VOLTAGE	4000	VOLTS
ANODE NO. 2 VOLTAGE	2000	VOLTS
ANODE NO. 1 VOLTAGE	ADJUSTED FOR FOCUS	
GRID VOLTAGE	NEAR CUT-OFF	
DEFLECTOR RESISTORS (CONNECTED TO ANODE NO. 2)	1 MEGOHM EACH	

NOTE: SHIELD TUBE FROM ALL STRAY FIELDS.

- <sup>A</sup> WHEN THE HEATER IS OPERATED AT A NEGATIVE POTENTIAL WITH RESPECT TO THE CATHODE THEN THE CATHODE RETURN SHOULD BE MADE AT THE CENTER TAP OF THE FILAMENT TRANSFORMER.
- <sup>B</sup> USE OF LESS THAN 1600 VOLTS RESULTS IN DECREASED BRILLIANCE.
- <sup>C</sup> CERTAIN TUBES MAY REQUIRE ADJUSTMENT OF +25% TO -30% WITH GRID VOLTAGE BETWEEN ZERO AND CUT-OFF.
- <sup>D</sup> THE VISUAL EXTINCTION OF A FOCUSED SPOT.
- <sup>E</sup> THE GRID SUPPLY SHOULD BE VARIABLE TO  $\pm 50\%$ .
- <sup>F</sup> VALUES SUBJECT TO VARIATION OF  $\pm 20\%$ .

## DEFLECTOR LOCATIONS:



D1 AND D2	NEAREST TO SCREEN
D3 AND D4	NEAREST TO BASE
D1	SAME SIDE OF TUBE AS PIN NO. 5
D3	SAME SIDE AS PIN NO. 2

CONTINUED NEXT PAGE

PLATE  
1412  
MARCH 15  
1944

## TUNG-SOL

CONTINUED FROM PRECEDING PAGE

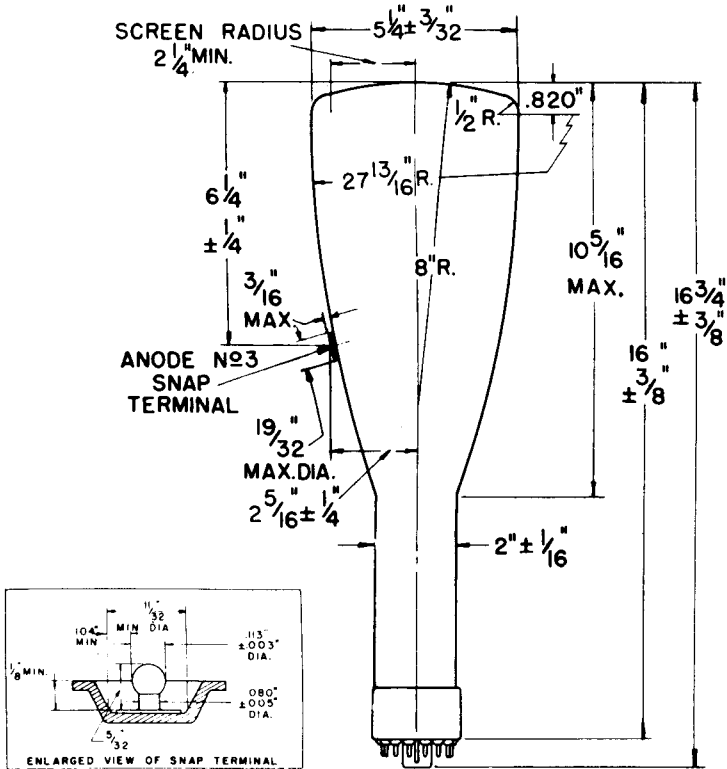

BOTTOM VIEW

1. HEATER
  2. CATHODE
  3. GRID NO. 1
  4. INTERNAL CONNECTION (DO NOT USE)
  5. ANODE NO. 1
  7. DEFLECTOR NO. 3 (D3)
  8. DEFLECTOR NO. 4 (D4)
  9. GRID NO. 2
  10. ANODE NO. 2
  10. DEFLECTOR NO. 2 (D2)
  11. DEFLECTOR NO. 1 (D1)
  12. NO CONNECTION
  14. HEATER
- A. ANODE NO. 3 (SNAP TERMINAL)