

REFLEX KLYSTRON

(MECHANICALLY TUNED)



MAXIMUM RATINGS

(ABSOLUTE VALUES)

| | |
|-------------------------------|---------------------|
| Resonator Voltage | 330 Vdc |
| Reflector Voltage | — 300 Vdc |
| Filament Voltage | $6.3 \pm 8\%$ volts |
| Resonator Current | 35 mA dc |
| Heater — Cathode Voltage..... | ± 50 Vdc |

PHYSICAL CHARACTERISTICS

- *Dimensions:* Refer to the outline drawing.
- *Base:* Modified Small Octal 8-Pin, B8-21, Low Loss Phenolic.
- *Output Coupling:* Coaxial. (See Typical Adapter Assembly Drawing.)
- *Cooling:* Convection.
- *Mounting Position:* Any.
- *Bulb:* Metal.
- *Tuner:* Allen Socket Screw for #8 Allen Wrench.

DESCRIPTION

The 6584 (Bendix® Red Bank Type TK-69) Tube is a mechanically tuned C band reflex oscillator. The electrical characteristics of the 6584 have been designed to be similar to the type 6115, with the exception that the repeller voltage variation with frequency has been reduced. The tube is designed for use as a CW oscillator over the range of 5100 Mc./sec. to 5900 Mc./sec. The tube is capacitively tuned over this frequency range by changing the interaction gap spacing.

The design is such as to exhibit no spurious oscillation modes when the output connector is properly terminated.

The electron optics of the tube have been designed to reduce electrical hysteresis to a minimum.

The mechanical tuner design eliminates long mechanical and thermal paths external to the tube structure as well as the use of overstressed diaphragms; hence, mechanical tuning hysteresis is virtually eliminated. In addition, the cavity diaphragm is completely contained within the vacuum enclosure thus eliminating frequency sensitivity to atmospheric pressure as present in tubes having the diaphragm as a part of the vacuum enclosure.

Output coupling is accomplished by means of a coaxial output lead. The output line may be coupled into a coaxial system or directly into a waveguide mount by means of the Typical Adaptor Assembly drawing shown on the last page. This adaptor is the same as the one used for the JAN-2K29.





APPLICATION NOTES

This tube is designed to have improved temperature and altitude characteristics, fast warm-up, stabilized warm-up frequency drift, and reduced repeller voltage variation with frequency. The tube is applicable for use in equipments operating in widely varying ambient temperatures, varying atmospheric pressures and in intermittent operation. Such applications include airborne radar systems, telemetering and microwave relay links. In addition, the reduced repeller voltage vs. frequency characteristic makes possible savings in components for an a/c system with given characteristics.

THE *Bendix* CORPORATION

Red Bank DIVISION, EATONTOWN, NEW JERSEY

AVERAGE CHARACTERISTICS

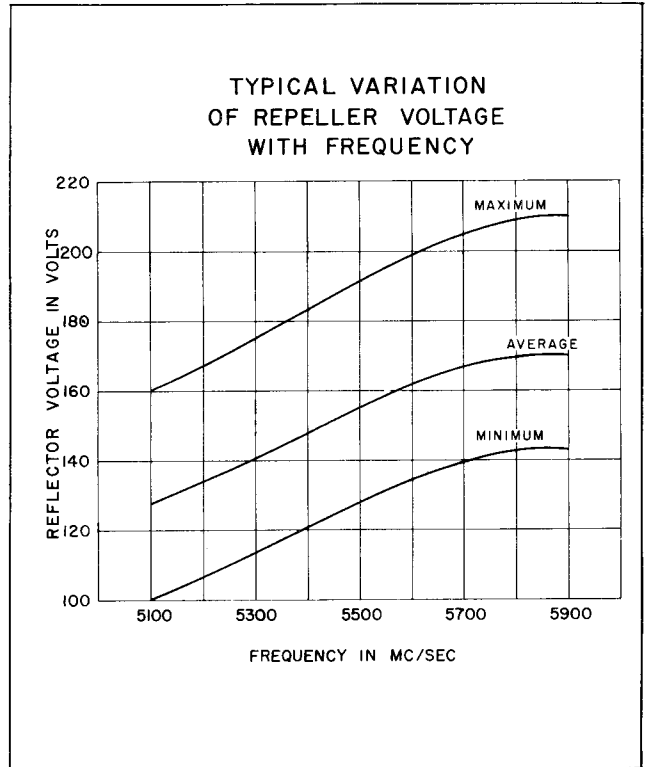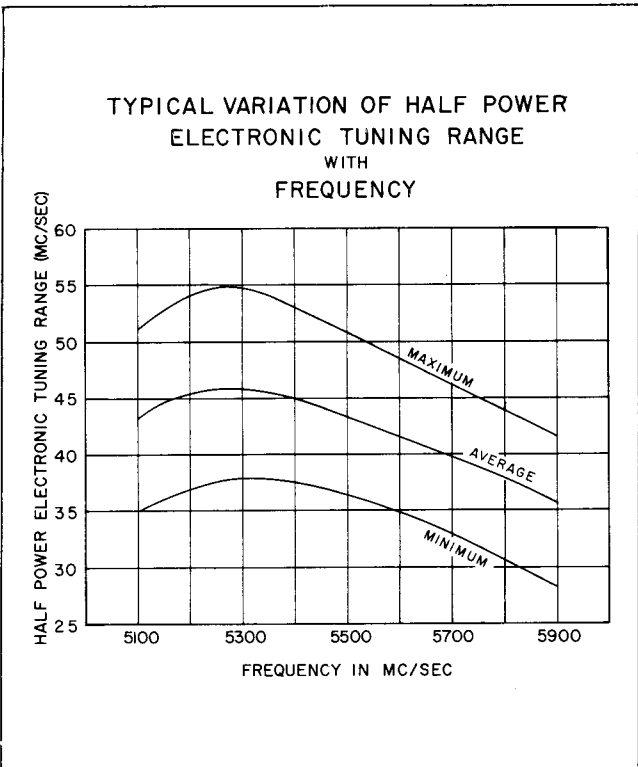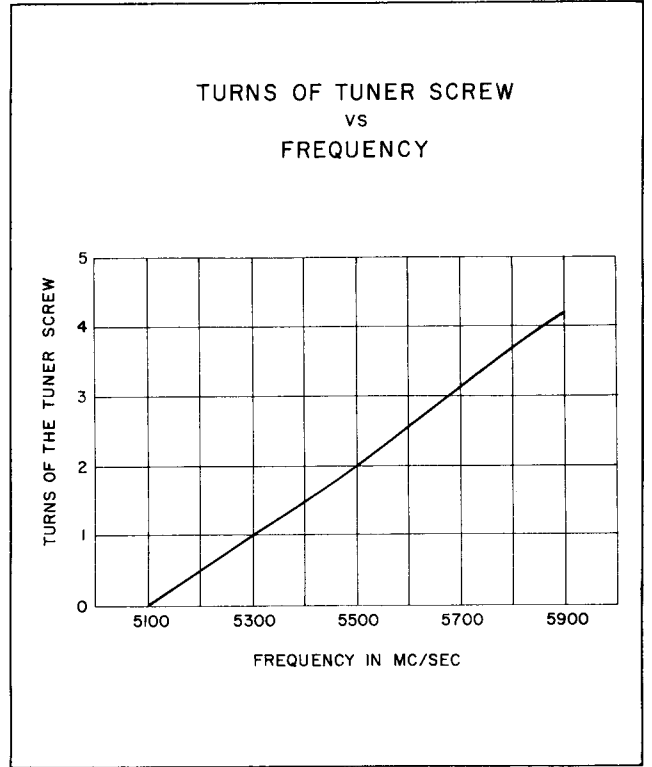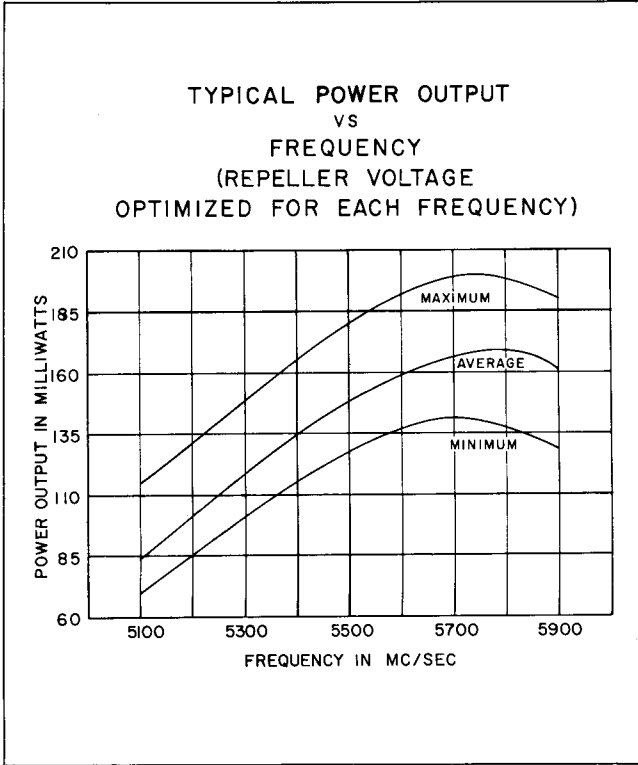

ELECTRICAL CHARACTERISTICS & TEST CONDITIONS

Test Conditions and Specification Limits

| TEST | CONDITIONS | SYMBOL | LIMITS | | UNITS |
|-------------------------------|---|--------------------------|--------|-----------|-------|
| | | | MIN. | MAX. | |
| PRODUCTION TESTS | | | | | |
| Total Reflector Current | Er = -100 Vdc | Ir | — | 7 | uAdc |
| Reflector Leakage Current | Er = -100 Vdc | Ir | — | 5 | uAdc |
| Reflector Gas Current | Er = -100 Vdc | Ir | — | 2 | uAdc |
| Bump | Test Conditions; Er/max Po | Δ Po/Po | — | 0.10 | |
| Resonator Current | Test Conditions; Er = -100 Vdc | Irs | — | 32 | mAdc |
| Mechanical Tuning Range | Er/max Po | F min | — | 5100 | Mc |
| | | F max | 5900 | — | Mc |
| Power Output (1) | F = 5100 Mc; Er/max Po | Po | 70 | — | mW |
| Reflector Voltage (1) | F = 5100 Mc; Er/max Po | Er | -100 | -160 | Vdc |
| Reflector Voltage (2) | F = 5900 Mc; Er/max Po | Er | -140 | -210 | Vdc |
| Electronic Tuning (2) | F = 5900 Mc; Er/50% Po | Δ F | 28 | — | Mc |
| Emission | Ef = 5.8 V | Δ Ik/Ik | — | 0.15 | |
| Life Test | Test Conditions | t | 500 | — | hrs |
| Life Test End Points | Power Output; F = 5900; Er/max Po | Po | 100 | — | mW |
| DESIGN TESTS: | | | | | |
| Insulation | Ehk \pm 45 Vdc | | — | 100 | uAdc |
| Electrode Insulation | 500 Vdc; Tube Cold | Rk-rs | 2 | — | Meg |
| | | Rk-rs | 2 | — | Meg |
| Vibration Operating* | F = 25 cps, Peak to Peak Excursion .080" t = 60 sec | Fm | | \pm 1.5 | Mc |
| | | | | | |
| Heater Current | Test Conditions | | 450 | 550 | mA |
| Power Output (2) | F = 5900 Mc; Er/max Po | Po | 120 | — | mW |
| Electronic Tuning (1) | F = 5100 Mc; Er/50% Po | Δ F | 34 | — | Mc |
| Hysteresis | Test Conditions; Er/max Po | Ratio | — | 0.05 | |
| Modulation Sensitivity | Test Conditions; Er/max Po; Δ Er = \pm 3 V | Δ F/ Δ Er | 0.61 | 1.2 | Mc/V |
| Resonator Voltage Sensitivity | Test Conditions; Er/max Po; Δ Ers = 20v p to p ac | Δ F/ Δ Ers | — | 0.320 | Mc/V |

TEST CONDITIONS:



| Ef. | Eres. | Er | Irs | Ehk | F |
|-----------|---------|------------|---------|-----|---------|
| 6.3 volts | 300 Vdc | Adjust Vdc | 25 mAdc | 0 | 5500 Mc |

*Tube is mechanically pretuned to 5100 Mc. Vibration tests are conducted on a cyclic basis for nine five minute periods in each of three mutually perpendicular planes. The tube must be capable of meeting all production tests after completion of the vibration tests.

REFLEX KLYSTRON

(MECHANICALLY TUNED)

Bendix Type TK-69 **6584**

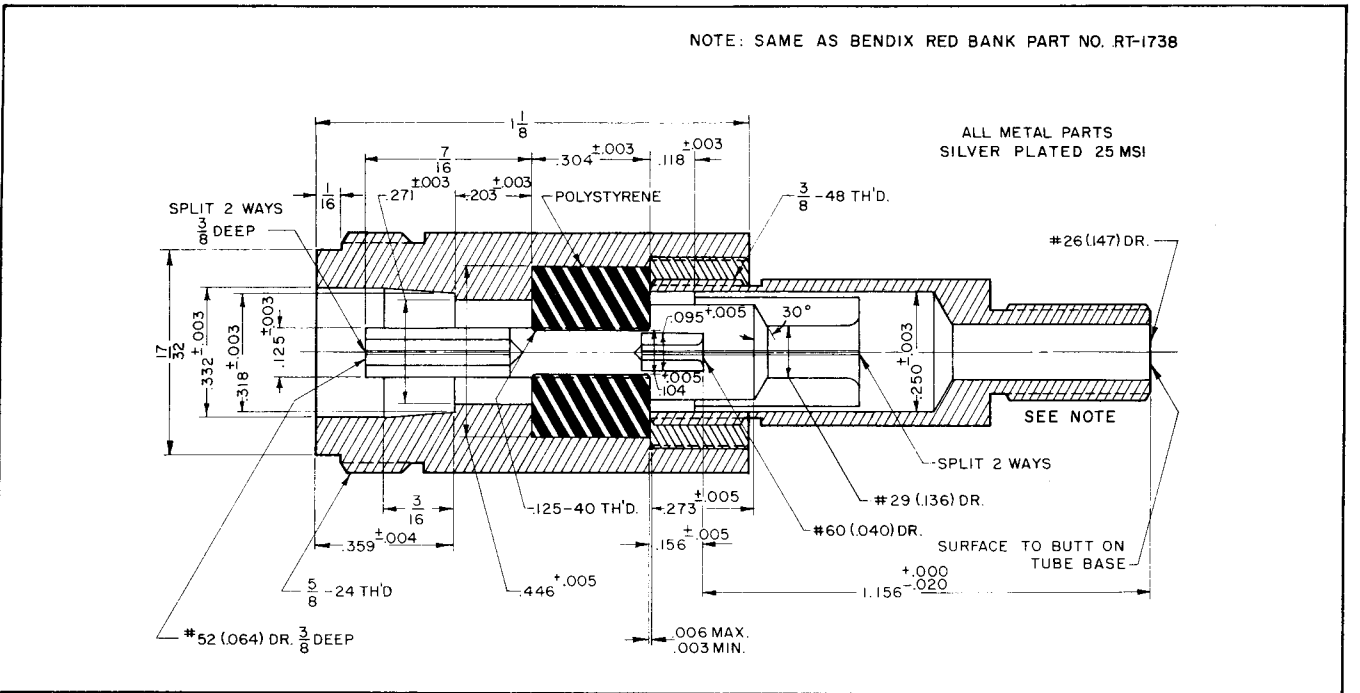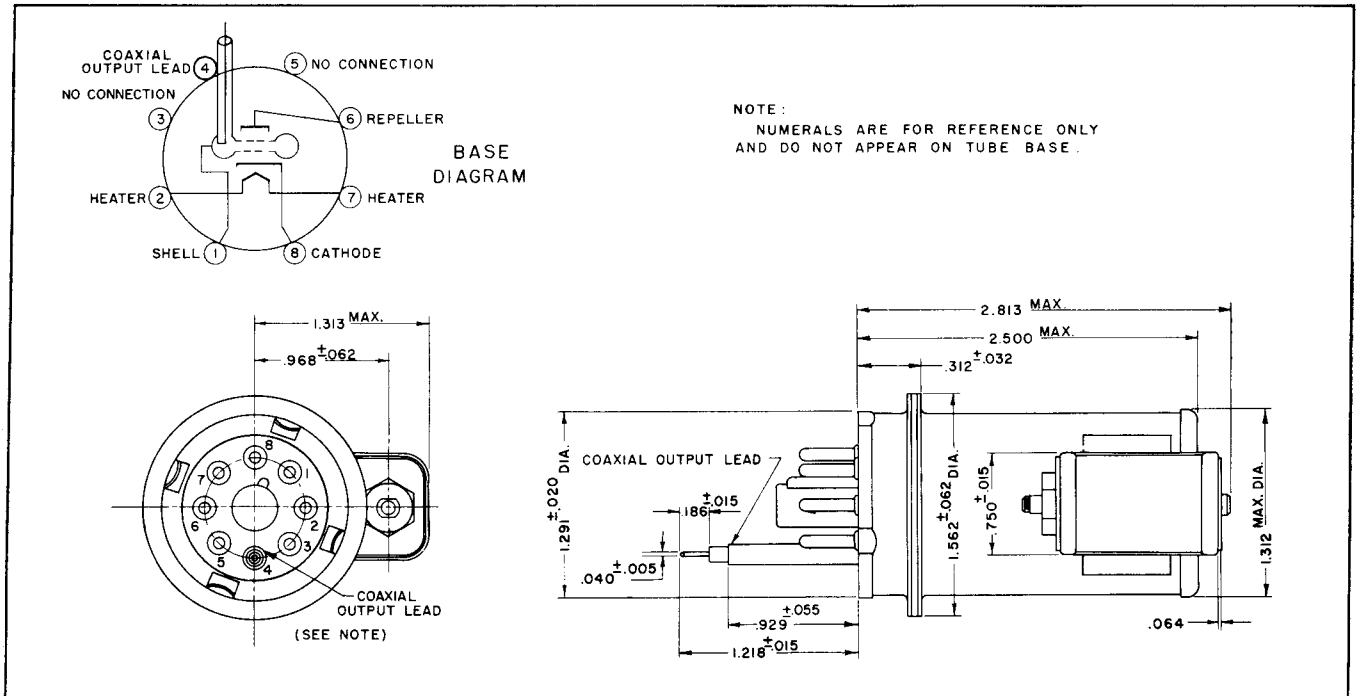

COAXIAL OUTPUT ADAPTOR

THE Bendix CORPORATION

Red Bank DIVISION, EATONTOWN, NEW JERSEY

West Coast Sales & Service: 117 E. Providencia Ave., Burbank, Calif.
 Export Sales & Service: Bendix International Division,
 205 E. 42nd St., New York 17, N.Y.
 Canadian Distributor: Computing Devices of Canada, Ltd., P.O. Box 508,
 Ottawa 4, Ontario