



5825

5825

# HALF-WAVE VACUUM RECTIFIER

## GENERAL DATA

### Electrical:


Filament, Thoriated Tungsten:  
 Voltage . . . . . 1.6 . . . . . ac volts  
 Current . . . . . 1.25 . . . . . amp  
 Direct Interelectrode Capacitance:<sup>o</sup>  
 Plate to Filament . . . . . 2.2 . . . . .  $\mu$ f  
 Tube Voltage Drop at maximum  
 peak plate current . . . . . 1750 . . . . . volts

<sup>o</sup> with no external shield.

### Mechanical:

Mounting Position . . . . . Any  
 Overall Length . . . . . 5-11/16"  $\pm$  5/32"  
 Seated Length . . . . . 5-1/6"  $\pm$  5/32"  
 Maximum Diameter . . . . . 2-1/16"  
 Bulb . . . . . ST-16  
 Cap . . . . . Medium  
 Base . . . . . Medium-Shell Small 4-Pin  
 Basing-Designation for BOTTOM VIEW . . . . . 4P

Pin 1 - Filament  
 Pin 2 - No  
 Connection  
 Pin 3 - No  
 Connection



Pin 4 - Filament,  
 Internal  
 Shield  
 Cap - Plate

## HALF-WAVE RECTIFIER

### Maximum Ratings, Absolute Values:

*For supply frequencies up to 250 kc*

PEAK INVERSE PLATE VOLTAGE . . . . . 60000 max. volts  
 PEAK PLATE CURRENT . . . . . 40 max. ma  
 AVERAGE PLATE CURRENT . . . . . 2 max. ma  
 HOT-SWITCHING TRANSIENT CURRENT for  
 duration of 0.1 sec. max. . . . . 100 max. ma  
 PLATE DISSIPATION . . . . . 3.5 max. watts  
 BULB TEMPERATURE . . . . . 80 max.  $^{\circ}$ C

### Typical Operation at 70 kc in Half-Wave Circuit

with Capacitor-Input to Filter:

AC Plate-Supply Voltage (RMS) . . . . . 21200 volts  
 Filter-Input Capacitor . . . . . 350  $\mu$ f  
 Effective Plate-Supply Impedance . . . . . 120000 ohms  
 DC Output Current . . . . . 2 ma  
 DC Output Voltage at Input to Filter (Approx.):  
 At half-load current (1 ma) . . . . . 28000 volts  
 At full-load current (2 ma) . . . . . 26700 volts  
 Voltage Regulation (Approx.):  
 Half-load to full-load current . . . . . 1300 volts

SEPT. 15, 1949

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA

5825



5825

### HALF-WAVE VACUUM RECTIFIER

#### CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

|                            | <u>Note</u> | <u>Min.</u> | <u>Max.</u> |               |
|----------------------------|-------------|-------------|-------------|---------------|
| Filament Current . . . . . | 1           | 1.15        | 1.35        | amp           |
| Plate-Filament Capacitance | -           | 2.14        | 2.26        | $\mu\text{f}$ |

Note: With 1.6 volts dc on filament.

#### OPERATING NOTES

When the filament is supplied from an rf power source which is at a high dc potential above ground, adjustment of the filament voltage by direct measurement is usually impractical. However, a simple method utilizing visual comparison of filament temperatures can be used for adjustment of filament power. The color temperature of the filament operating from an rf power source may be checked visually by observing in a darkened room the reflection of the incandescent filament upon the surface of the internal shield. A visual comparison of this color temperature with that obtained when the filament of another 5825 is operated from a dc or low-frequency ac supply of 1.6 volts, provides a convenient means for adjusting the amount of rf excitation to produce 1.6 volts (rms) at the filament terminals.

The filament must never under any condition of operation be allowed to reach a temperature higher than that caused by operating the filament on dc or low-frequency ac at a voltage of 1.68 volts. Operation at higher temperatures will cause impaired performance of the tube. During circuit adjustment, however, it is permissible to allow the filament voltage to rise to 2 volts for the brief interval required to make the adjustment.


Soft x-rays are produced when the 5825 is operated at a plate voltage above approximately 20000 volts. These rays can constitute a health hazard unless the tube is adequately shielded. Relatively simple shielding should prove adequate, but the need for this precaution should be considered in equipment design.



5825

5825

# HALF-WAVE VACUUM RECTIFIER

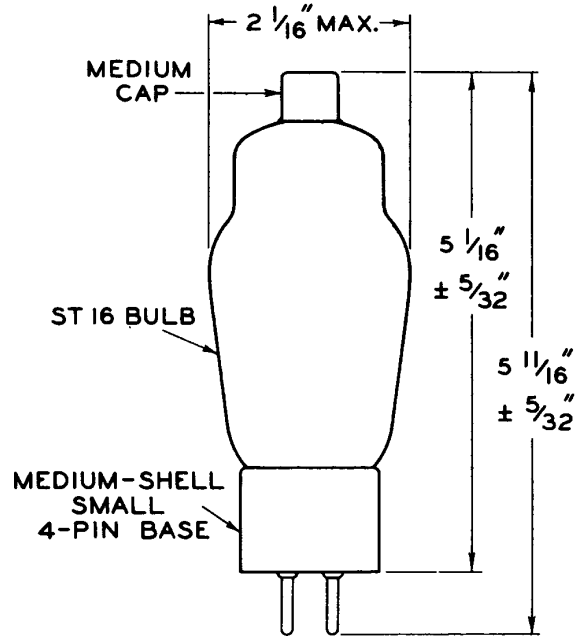

92CS-7176

SEPT. 15, 1949

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


CE-7176

5825



5825

# HALF-WAVE VACUUM RECTIFIER

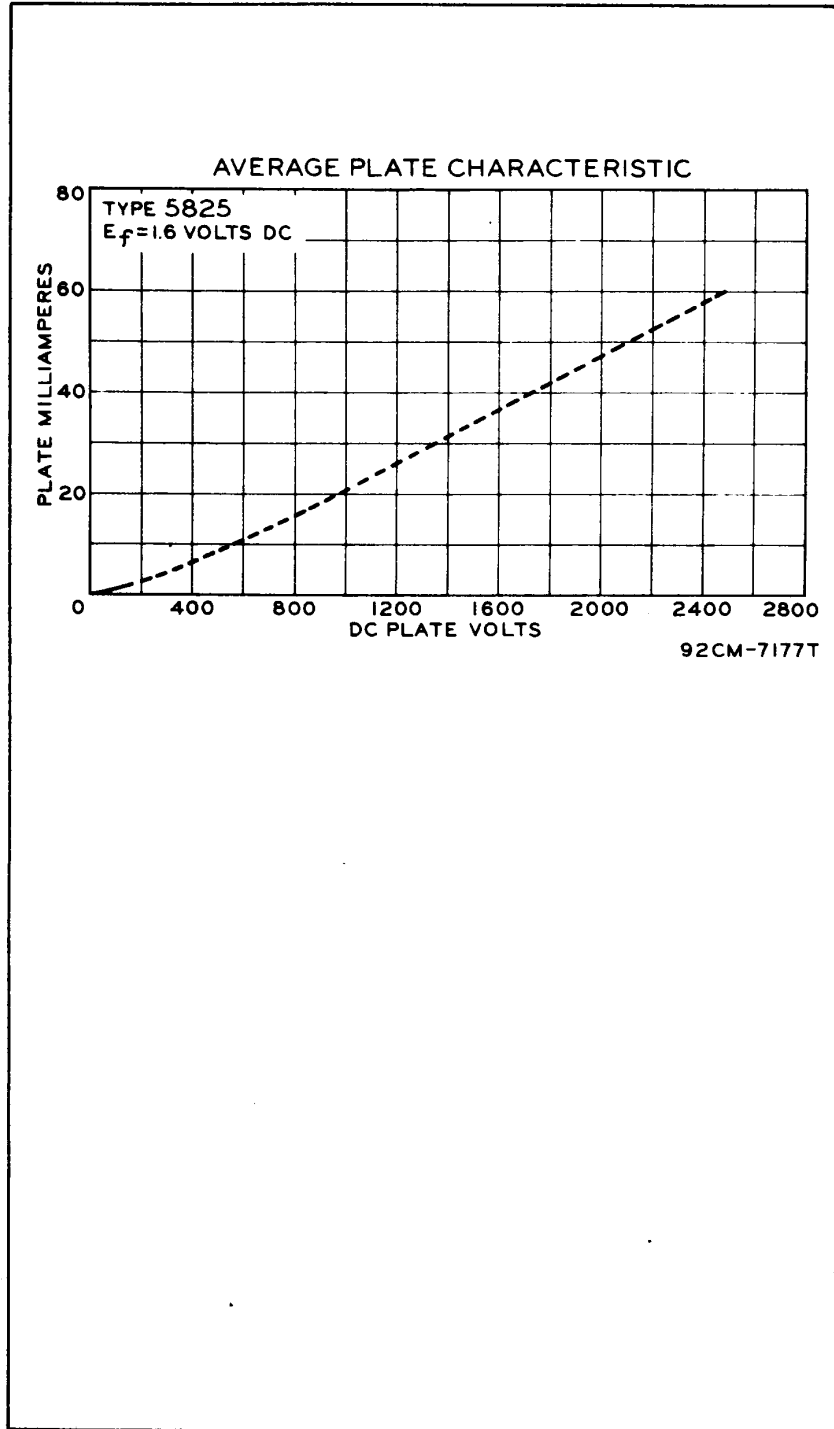

SEPT. 15, 1949

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-7177T