


STATUS: Limited Standard
 CLASSIFICATION OF EQUIPMENT: Unclassified
 USING SERVICE: Army
 DATE OF THIS SHEET: 29 Feb 52

AN/FCC-TYPE
 AN/COMP TYPE NUMBER: OA-11/FC
 CARRIER TERMINAL

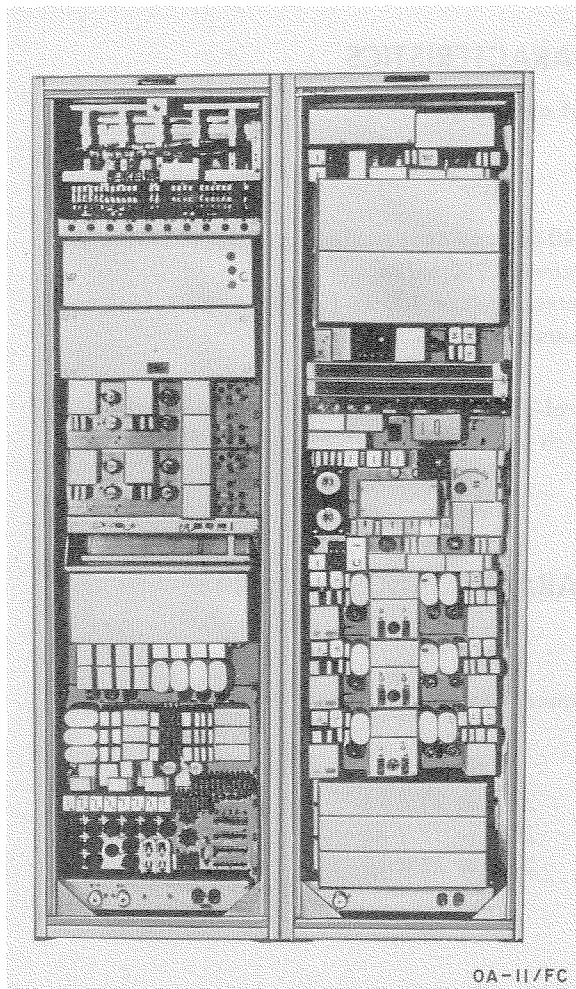

OA-11/FC

Carrier Terminal OA-11/FC is a wire communication terminal equipment used in conjunction with Carrier Terminal OA-12/FC to provide a means of superimposing three additional two-way telephone circuits on an existing open wire facility operated in the communications zone of a theater of operations.

This equipment consists of panel-mounted apparatus, inclosed in two steel floor type cabinets, comprising a self contained operating unit, which includes power supply equipment. This terminal is arbitrarily designated EAST the other OA-12/FC WEST.

To increase the operating range of a system using this equipment Carrier Repeater OA-9/FC is used.

Composite sets may be used to furnish two ground-return telegraph circuits and any channel of the system may be used for v-f telegraph communication.

It operates on 105 / 250-v ac.

AN/FCC-TYPE		INSTRUCTION LITERATURE: TM 11-2023
OA-11/FC	:AN/COMP TYPE NUMBER	CLASSIFICATION OF EQUIPMENT:Unclassified
CARRIER TERMINAL		USING SERVICE : Army
		DATE OF THIS SHEET : 29 Feb 52

MAJOR COMPONENTS

QUANT	NAME OF COMPONENT	DIMENSIONS (IN) INSTALLED	WEIGHT (LBS)
1	Line and Power Bay	22-1/4 x 17 x 84	600
1	Terminal Bay	22-1/4 x 17 x 84	600

OPERATIONAL CHARACTERISTICS

TACTICAL USE: Communications zone of a theater of operations.

INSTALLATION: Fixed station.

MAXIMUM SYSTEM LENGTH: Without repeaters: on 104-gauge copper-clad steel-approximate 175 miles; on copper-approximate 250 miles.
 With intermediate repeaters spaced 100 to 175 miles apart, length can be extended several thousand miles.

CAN COMMUNICATE WITH: Repeater, terminal, central-office and related station equipment and subsidiary apparatus which operates in the same connecting facility in fixed plant systems.

TECHNICAL CHARACTERISTICS

FACILITIES REQUIRED FOR TRANSMISSION: Wire.

FACILITIES AFFORDED: Two-wire, 3 circuits (6 channels for 2-way transmission).

FREQUENCY:	<u>Sending</u>	<u>Receiving</u>
Channel 1:	12.9 kc	24.4 or 21.4 kc
2:	9.4 kc	20.7 or 17.7 kc
3:	6.3 kc	28.4 or 25.4 kc

TYPE OF MODULATION: Am.

TYPE RINGING: 1,000 cyc.

POWER REQUIREMENTS: Approximate 250 w from a 105 - 125 v, 50/60 cyc source.

PHYSICAL CHARACTERISTICS

Carrier Terminal OA-11/FC weighs 1,200 pounds net, volume 36.8 cu ft. Packed for export shipment: total weight 1,680 pounds, total volume 75 cu ft, 1.9 ship tons. Shipped in 3 packages.