


STATUS: Limited Standard  
 CLASSIFICATION OF EQUIPMENT: Unclassified  
 USING SERVICE: Navy  
 DATE OF THIS SHEET: 29 May 52

**AN/SRT-TYPE**

SERVICE TYPE NUMBER: TAJ-2 through -10  
 500 WATT TRANSMITTING EQUIPMENT

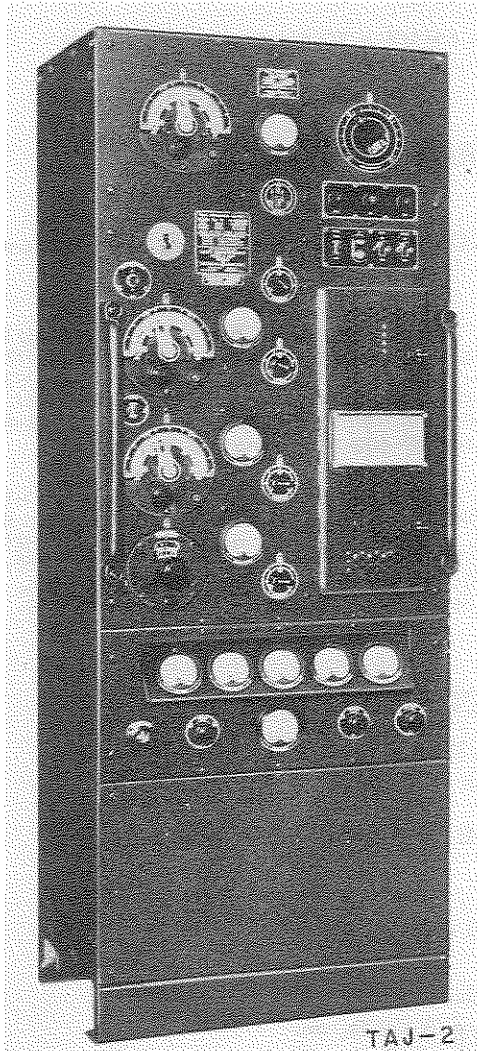

500 Watt Transmitting Equipments TAJ-2 through -10 are general purpose, m-f, medium-power, a-m (cw and mcw) radiotelegraph transmitters for ship-board use. The transmitters may be operated locally or from a remote point over a standard four- or six-wire control system.

These equipments have continuously variable master oscillator frequency control, while the TAJ-2 and -3 use crystal control.

The TAJ-8 through -10 transmitters may be relay keyed at speeds up to 100 wpm on cw and vacuum tube keyed at speeds up to 50 wpm on mcw.

The type of transmitter and power equipment used depends upon the power source available.

<b>AN/SRT-TYPE</b>		INSTRUCTION LITERATURE: NavShips 95288, 900,248
		CLASSIFICATION OF EQUIPMENT: Unclassified
TAJ-2 through -10	:SERVICE TYPE NUMBER	USING SERVICE : Navy
500 WATT TRANSMITTING EQUIPMENT		DATE OF THIS SHEET : 29 May 52

**MAJOR COMPONENTS**

QUANT	NAME OF COMPONENT	DIMENSIONS (IN) INSTALLED	WEIGHT (LBS)
1	Radio Transmitter CG-4440 or -4444; CRV-52009, -52022; CAY-52029; CG-52078; CRR-52142, or -52143; CG-52140, -52167, or -52189	70 x 26-7/8 x 19	450
1	* Motor-Generator Set CG-4083, -4084, -21044, -21045, -21296, -21297, -21298, -21466, -21467, -21468, -21456, -21456A, -21571	72 x 27 x 24 72-1/4 x 27 x 24 18 x 33-3/8 x 18 20 x 71-3/4 x 17 18 x 64-3/4 x 12-3/4	645 610 527 960 960

\* Does not apply to TAJ-4, -5

**OPERATIONAL CHARACTERISTICS**

TACTICAL USE: Shipboard.

INSTALLATION: Shipborne.

APPROXIMATE RANGE (IN MILES): Medium.

CAN COMMUNICATE WITH:

TAJ-2, -3: AN/FRR-4, -28; AN/GRR-2, -3; AN/MRC-5, -8, -20; AN/SRC-3; AN/SRR-3, -11, -12; AN/TRQ-1;  
AN/URR-10, -22, -23; AN/VRC-4; BC-314, -344, -348, -453, 779, -1004; MBS; OA-58/FRC;  
R-62/PR, -80/PR, -96/SR, -129/U, -203/SR, -205/U, -206/PR, -210/U, -211/U, -212/SR,  
-213/SR, -215/SR, -247/URR, -274/FRR, -320/FRC, -388/URR; RAK; RAL; RAO; RAS; RBA; RBB;  
RBG; RBH; RBL; RBM; RBO; RCF; RCG; RCH; RDF; RDM; SCR-177, -244, -274, -614; AR-88  
(RCA); ARC Type 12; Fisher TS 25-3; Hammarlund SP-600-JX; National HRO-50.

TAJ-4 through -10: AN/ARC-5, -8; AN/FRR-4, -28; AN/GRR-2, -3; AN/MRC-20; AN/SRC-3; AN/SRR-3, -11, -12;  
AN/TRQ-1; AN/URR-10, -22, -23; AN/VRC-4; BC-314, -344, -348, -453, -779, -1004; MBS;  
OA-58/FRC; R-62/PR, -80/PR, -96/SR, -129/U, -203/SR, -205/U, -206/PR, -210/U, -211/U,  
-212/SR, -213/SR, -215/SR, -247/URR, -274/FRR, -320/FRC, -388/URR; RAK; RAL; RAO; RAS;  
RBA; RBB; RBG; RBH; RBL; RBM; RBO; RCF; RCG; RCH; RDF; RDM; SCR-177, -244, -274, -614;  
AR-88 (RCA); ARC Type 12; Fisher TS 25-3; Hammarlund SP-600-JX; National HRO-50.

**TECHNICAL CHARACTERISTICS**

FREQUENCY RANGE IN MEGACYCLES: TAJ-2, -3: 0.195 - 0.60  
TAJ-4 through -10: 0.175 - 0.60.

TYPE MODULATION: Am. TYPE OF SIGNAL: Cw, mcw.

POWER OUTPUT: TAJ-2 through -7: 500 w.  
TAJ-8 through -10: 500 w on cw, 250 w on mcw.

POWER REQUIREMENTS: TAJ-2, -3: 3 kw, 115/230 v dc.  
TAJ-4: 2.82 kw, 230 v, 60 cyc, 3 phase, ac.  
TAJ-5, -6, -7, -9: 440 v, 60 cyc, 3 phase, ac.  
TAJ-8: 220/440 v, 60 cyc, 3 phase, ac or 3.2/3.46 kw, 115/230 v dc.  
TAJ-10: 440 v, 60 cyc, 3 phase, ac or 3.2/3.46 kw, 115/230 v dc.

**PHYSICAL CHARACTERISTICS**

Information on 500 Watt Transmitting Equipments TAJ-2 through -10 not available.