



25Z6-GT

Description and Rating

HIGH-VACUUM RECTIFIER DOUBLER

GENERAL DESCRIPTION


Principal Application: The 25Z6-GT is a heater-cathode type full-wave high-vacuum rectifier-doubler tube designed for use in the power supply of a-c or

a-c/d-c receivers. Electrically the 25Z5, 25Z6 and 25Z6-GT are identical.

Cathode: . . . . . Coated Unipotential  
 Heater Voltage (A-C or D-C) . . . . . 25.0 Volts  
 Heater Current . . . . . 0.3 Ampere

Envelope: . . . . . T-9 Glass  
 Base: B7-7 Intermed Shell Octal 7-Pin Phenolic  
 Mounting Position: . . . . . Any

PHYSICAL DIMENSIONS

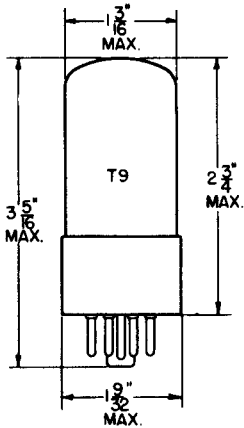


RMA 9-11

TERMINAL CONNECTIONS

- Pin 1 - No Connection
- Pin 2 - Heater
- Pin 3 - Plate Number 2
- Pin 4 - Cathode Number 2
- Pin 5 - Plate Number 1
- Pin 7 - Heater
- Pin 8 - Cathode Number 1

BASING DIAGRAM



RMA 7Q  
 BOTTOM VIEW


MAXIMUM RATINGS

	Design Center	Absolute	
Peak Inverse Plate Voltage . . . . .	700	770	Volts
A-C Plate Voltage per Plate (RMS) . . . . .	235	260	Volts
Peak Plate Current per Plate . . . . .	450	495	Milliamperes
D-C Output Current per Plate . . . . .	75	83	Milliamperes
D-C Heater-Cathode Voltage . . . . .	350	385	Volts


CHARACTERISTICS AND TYPICAL OPERATION

	Half-Wave Rectifier			Voltage Doubler		
	Half-Wave	Full-Wave	Full-Wave	Half-Wave	Full-Wave	
Heater Voltage . . . . .	25	25	25	25	25	Volts
A-C Plate Voltage per Plate (RMS) . . . . .	117	150	235	117	117	Volts
Minimum Total Plate-Supply Impedance per Plate . . . . .	15	40	100	30	15	Ohms
D-C Output Current per Plate . . . . .	75	75	75	75	75	Milliamperes
D-C Output Voltage at Input to Filter (Approx):						
At Half-Load Current . . . . .	115	---	255	---	250	Volts
At Full-Load Current . . . . .	80	---	200	---	205	Volts
Difference (Voltage Regulation) . . . . .	35	---	55	---	45	Volts
Percentage Regulation . . . . .	30	---	22	---	18	Per Cent
Filter Input Capacitor . . . . .	16	16	16	16	16	Microfarads
Tube Voltage Drop: Applied D-C at 150 Milliamperes per Plate . . . . .			22			Volts

AVERAGE PLATE CHARACTERISTICS

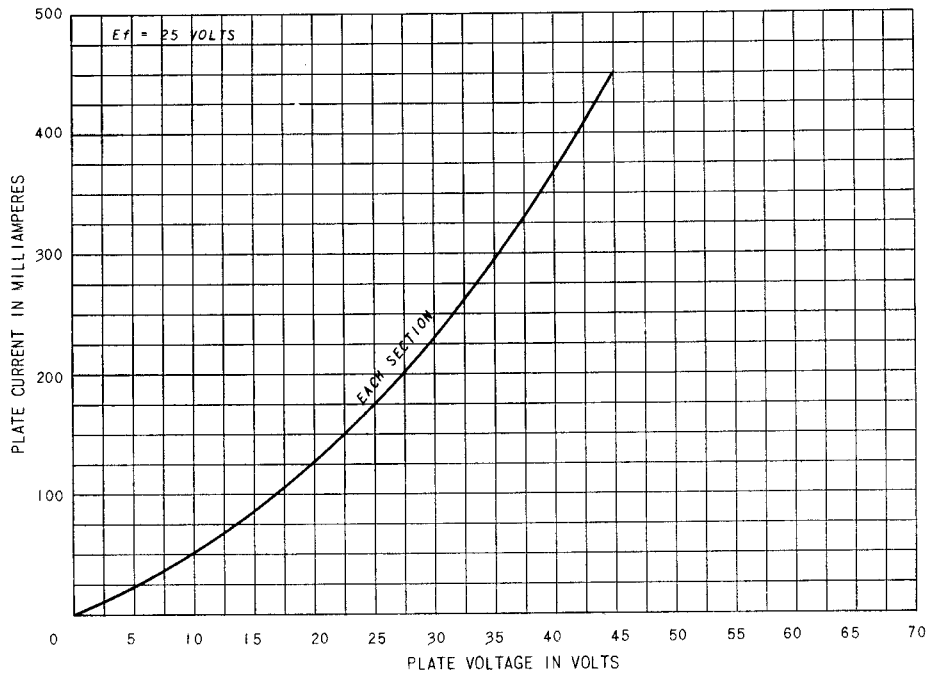

OPERATION CHARACTERISTICS

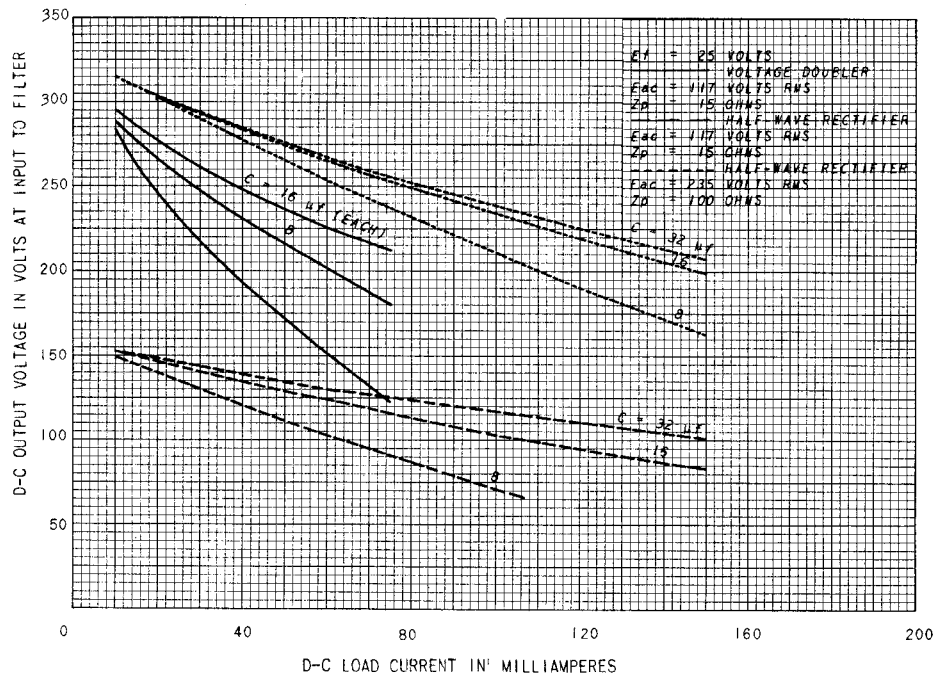

Electronics Department



Schenectady, N. Y.