

CHARACTERISTICS

GENERAL DATA

| | |
|---|-------------------|
| Focusing Method | Magnetic |
| Deflecting Method | Magnetic |
| Deflection Angles (approx.) | |
| Horizontal | 85 Degrees |
| Diagonal | 90 Degrees |
| Phosphor | Aluminized P4 |
| Fluorescence | White |
| Persistence | Short to Medium |
| Faceplate | Gray Filter Glass |
| Light Transmittance (approx.) | 75 Percent |

ELECTRICAL DATA

| | |
|---|--------------------------------|
| Heater Voltage | 6.3 Volts |
| Heater Current | 0.6 ±5% Ampere |
| Heater Warm-up Time ¹ | 11 Seconds |
| Direct Interelectrode Capacitances (approx.) | |
| Cathode to All Other Electrodes | 5 μmf |
| Grid No. 1 to All Other Electrodes | 6 μmf |
| External Conductive Coating to Anode ² | 2500 μmf Max. 2000 μmf Min. |
| Ion Trap Magnet | External, Single Field Type |

MECHANICAL DATA

| | |
|---|---|
| Minimum Useful Screen Dimensions (Maximum Assured) | 21 ⁷ / ₁₆ x 16 ⁷ / ₈ Inches |
| Minimum Useful Screen Area | 332 Sq. Inches |
| Bulb Contact (Recessed Small Cavity Cap) | J1-21 |
| Base (Small Shell Duodecal 5-Pin) | B5-57 |
| Basing | 12N |

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

| | |
|---|-----------------|
| Anode Voltage | 24,200 Volts dc |
| Grid No. 2 Voltage | 660 Volts dc |
| Grid No. 1 Voltage | |
| Negative Bias Value | 155 Volts dc |
| Negative Peak Value | 220 Volts |
| Positive Bias Value | 0 Volts dc |
| Positive Peak Value | 2 Volts |
| Peak Heater-Cathode Voltage | |
| Heater Negative with Respect to Cathode | |
| During Warm-up Period not to Exceed | |
| 15 Seconds | 450 Volts |
| After Equipment Warm-up Period | 200 Volts |
| Heater Positive with Respect to Cathode | 200 Volts |

TYPICAL OPERATING CONDITIONS

| | |
|---|---------------------|
| Anode Voltage | 18,000 Volts dc |
| Grid No. 2 Voltage | 300 Volts dc |
| Grid No. 1 Voltage Required for Cutoff ³ | -28 to -72 Volts dc |
| Focusing Coil Current ⁴ | 125 ±15% Ma dc |
| Ion Trap Magnet Current (Average) ⁵ | 32 Ma dc |
| Field Strength of PM Ion Trap Magnet ⁶ | 36 Gausses Min. |

CIRCUIT VALUES

| | |
|---|------------------|
| Grid No. 1 Circuit Resistance | 1.5 Megohms Max. |
|---|------------------|



NOTES:

(Continued on Page 2)

1. Heater warm-up time is the time required for the voltage across the heater terminals to increase to 5.0 volts in the JETEC test circuit, with E = 25 volts and series R = 31.5 ohms.
2. External conductive coating must be grounded.

QUICK REFERENCE DATA

Television Picture Tube
24" Direct Viewed
Rectangular Glass Type
Spherical Faceplate
Gray Filter Glass
Magnetic Deflection
Magnetic Focus
Single Field Ion Trap
External Conductive Coating
Aluminized Screen

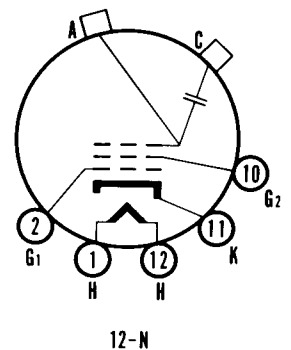

SYLVANIA ELECTRIC PRODUCTS INC.

TELEVISION PICTURE TUBE DIVISION

SENECA FALLS, NEW YORK

*Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA*

APRIL 1956

PAGE 1 OF 2

3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
4. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 30 foot lamberts on a $21\frac{7}{16} \times 16\frac{7}{8}$ inch picture area sharply focused at center of screen.
5. For JETEC Ion Trap Magnet No. 117 with pole pieces centered over Grid No. 2 on mount, and rotated for maximum brightness.
6. For typical PM ion trap magnet with field strength tolerance of ± 3 gauss.

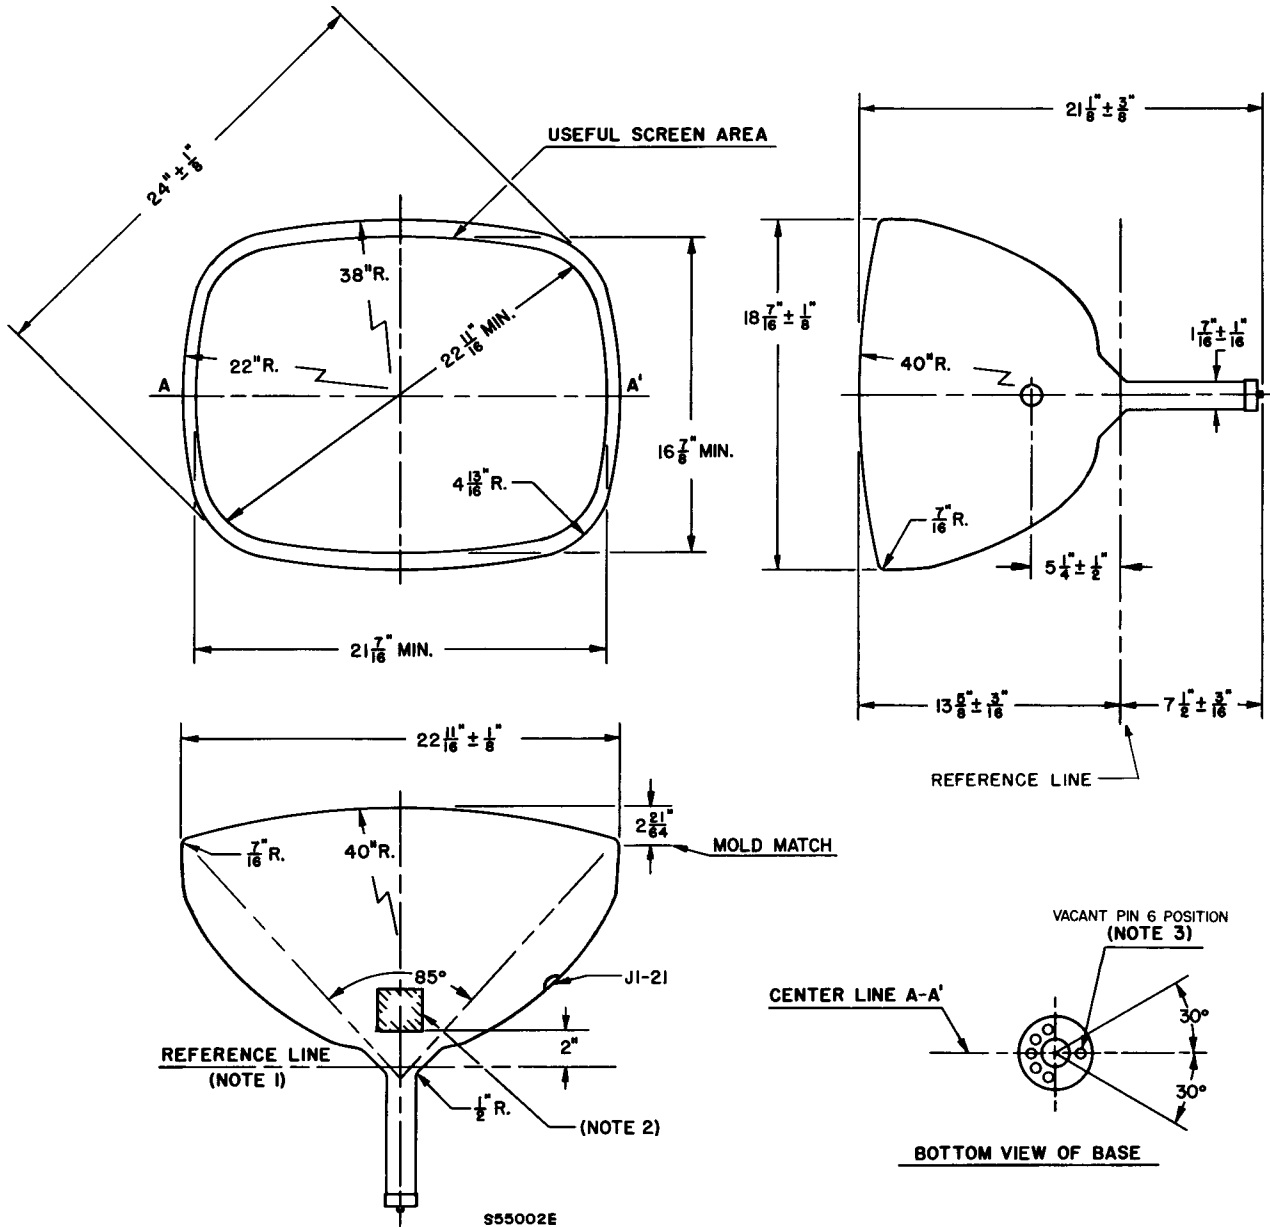


DIAGRAM NOTES:

1. Reference line is determined by the plane C-C' of the reference line gauge (JETEC No. 116) when the gauge is resting on the glass cone.
2. Contact area for external conductive coating, $2'' \times 2''$, located 90 degrees counterclockwise from anode contact as viewed from base end of tube.
3. Anode contact aligns with vacant pin position No. 6 ± 30 degrees.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.