

TUNG-SOL

PENTODE

MINIATURE TYPE

SHARP-CUTOFF PENTODE


FOR

USE AS AN IF AMPLIFIER


IN TV RECEIVERS

COATED UNIPOTENTIAL CATHODE

ANY MOUNTING POSITION



GLASS BULB
MINIATURE BUTTON
7 PIN BASE E7-1
OUTLINE DRAWING
JEDEC 5-2



BOTTOM VIEW
BASING DIAGRAM
JEDEC 7CM

THE 4DK6 IS A SHARP-CUTOFF PENTODE IN THE 7 PIN MINIATURE CONSTRUCTION. IT IS DESIGNED FOR SERVICE AS A WIDE-BAND HIGH-FREQUENCY AMPLIFIER AND IS PARTICULARLY SUITABLE FOR USE AS AN IF AMPLIFIER IN TELEVISION RECEIVERS. EXCEPT FOR HEATER CHARACTERISTICS AND RATINGS, THE 4DK6 IS IDENTICAL TO THE 3DK6 AND THE 6DK6.

DIRECT INTERELECTRODE CAPACITANCES

WITHOUT EXTERNAL SHIELD

GRID 1 TO PLATE	MAX.	0.025	pf
INPUT		6.3	pf
OUTPUT		1.9	pf

HEATER CHARACTERISTICS AND RATINGS

DESIGN MAXIMUM VALUES - SEE EIA STANDARD RS-239

AVERAGE CHARACTERISTICS	4.2	VOLTS	450	MA.
HEATER WARM-UP TIME			11	SECONDS
LIMITS OF SUPPLIED CURRENT			450 ± 30	MA.

MAXIMUM HEATER CATHODE VOLTAGE:

HEATER NEGATIVE WITH RESPECT TO CATHODE

TOTAL DC AND PEAK

200 VOLTS

HEATER POSITIVE WITH RESPECT TO CATHODE

DC COMPONENT

100 VOLTS

TOTAL DC AND PEAK

200 VOLTS

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE


MAXIMUM RATINGS



DESIGN MAXIMUM VALUES - SEE EIA STANDARD RS-239

PLATE VOLTAGE	330	VOLTS
GRID 2 SUPPLY VOLTAGE	330	VOLTS
GRID 2 VOLTAGE	See Rating Chart	
PLATE DISSIPATION	2.3	WATTS
GRID 2 DISSIPATION	0.55	WATTS
GRID 1 VOLTAGE - POSITIVE VALUE	0	VOLTS

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

PLATE VOLTAGE	125	VOLTS
GRID 3 (SUPPRESSOR)	Connected To Cathode At Socket	
GRID 2 VOLTAGE	125	VOLTS
CATHODE BIAS RESISTOR	56	OHMS
PLATE CURRENT	12.0	MA.
GRID 2 CURRENT	3.8	MA.
TRANSCONDUCTANCE	9 800	μ MHOS
PLATE RESISTANCE	APPROX. 0.35	MEG OHMS
GRID 1 VOLTAGE FOR $i_b = 20 \mu A$	-6.5	VOLTS

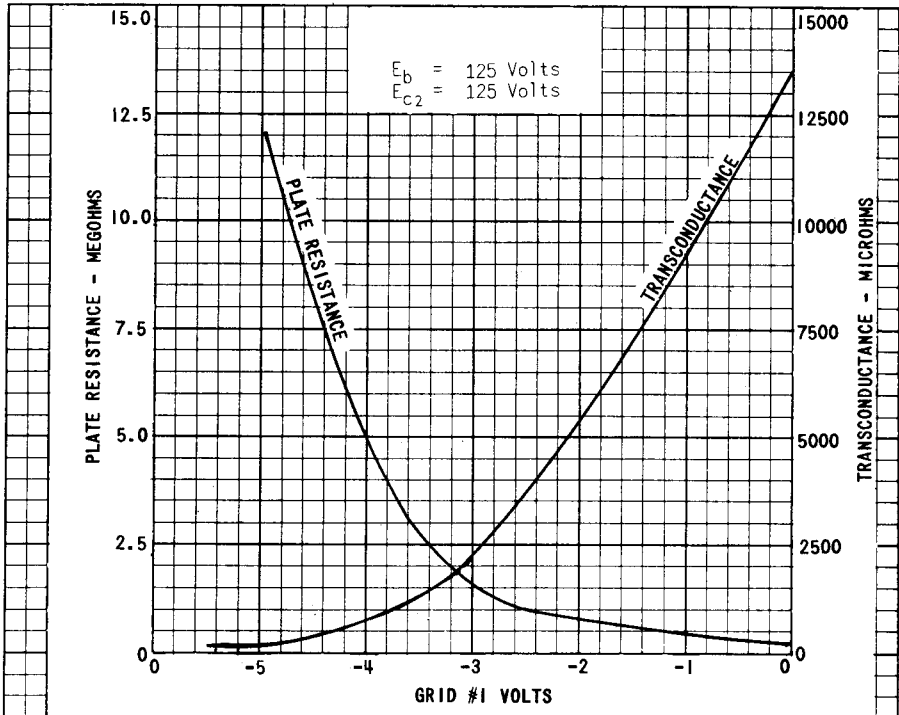

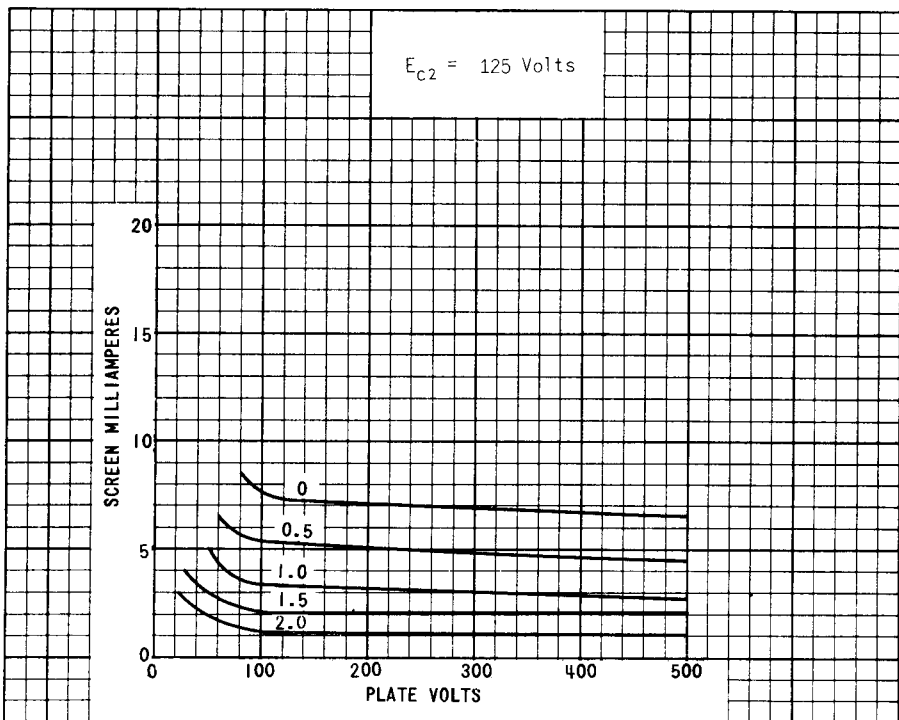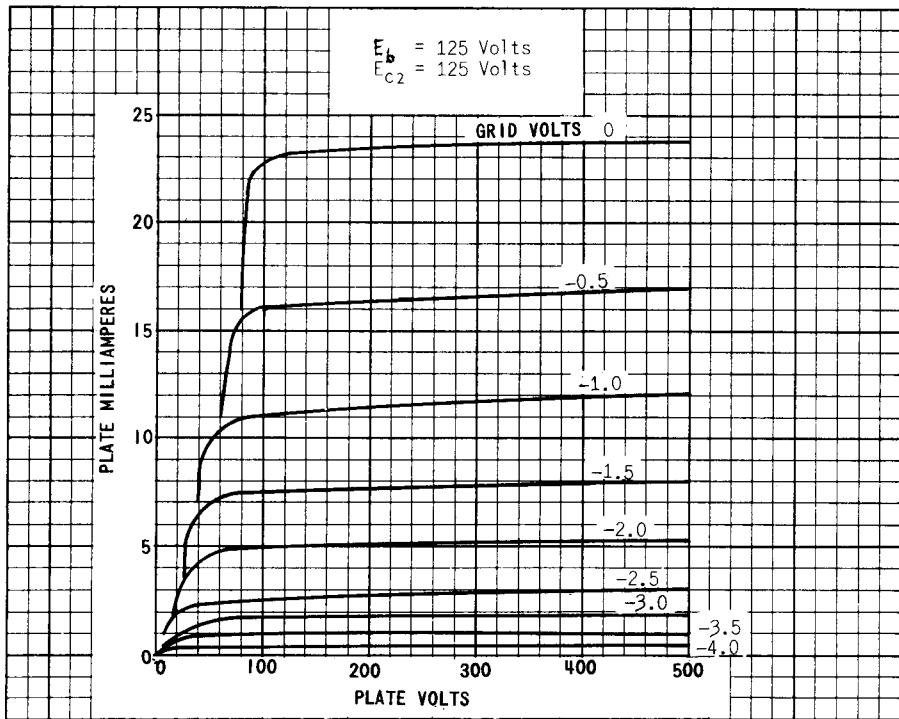

PRINTED IN U. S. A.

