



00-A

RCA-00-A

DETECTOR

VAPOR TYPE

Filament	Thoriated Tungsten		
Voltage	5.0		d-c volts
Current	0.25		amp.
Direct Interelectrode Capacitances:			
Grid to Plate	8.5		µuf
Grid to Filament	3.2		µuf
Plate to Filament	2.0		µuf
Maximum Overall Length			4-11/16"
Maximum Diameter	(2)	(3)	1-13/16"
Bulb			S-14
Base			Medium 4-Pin Bayonet
Pin 1-Filament+	(1)	(4)	Pin 3-Grid
Pin 2-Plate			Pin 4-Filament-

BOTTOM VIEW

DETECTOR


Characteristics.

Filament	5.0	d-c volts
Plate	45 maximum	volts
Grid	0	volts
Amp. Fact.	20	
Plate Res.	30000	ohms
Mut. Cond.	666	µmhos
Plate Cur.	1.5 approx.	ma.

Typical Operation:

Filament	5.0	d-c volts
Plate	45 maximum	volts
Grid	Grid return to (-) filament	
Grid Leak	2 or 3	megohms
Grid Condenser	0.00025	µf

AVERAGE PLATE CHARACTERISTICS

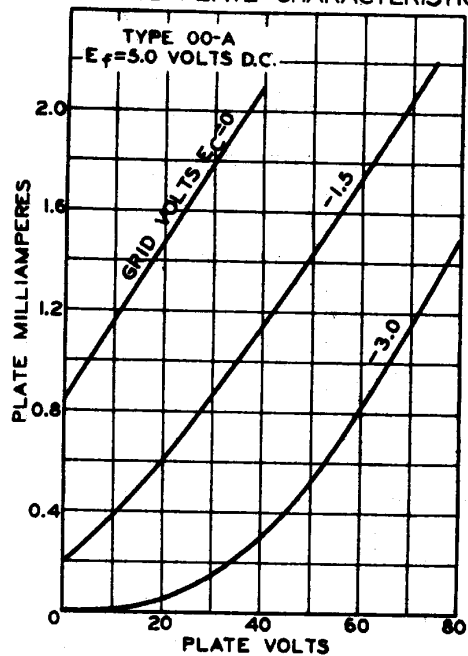

92S-520R1

JULY 1, 1935

RCA RADIOTRON DIVISION  
RCA MANUFACTURING COMPANY, INC.


DATA

00-A



RCA-00-A

### AVERAGE CHARACTERISTICS

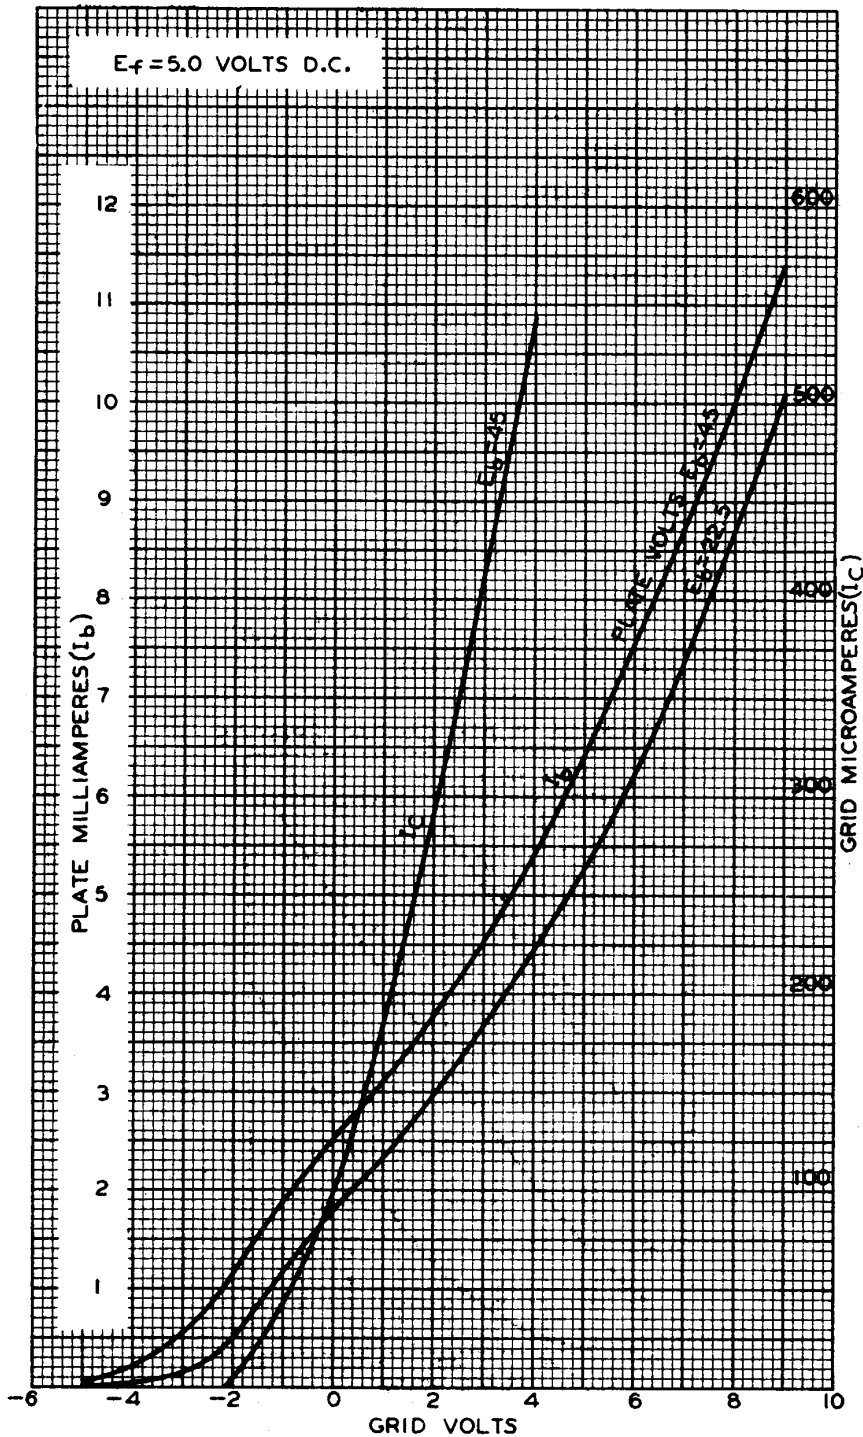

OCT. 31, 1933

RCA RADIOTRON DIVISION  
RCA MANUFACTURING COMPANY, INC.

925-5412